


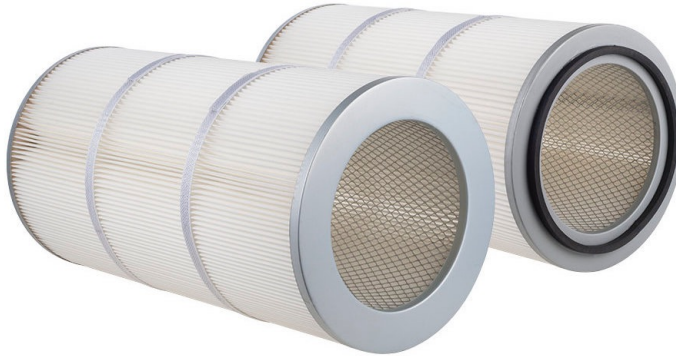

### ➤ Dimensions Details

| Outer Dimensions (mm) | Inner Dimensions (mm) | Height (mm)        | Pleat Height (mm) |
|-----------------------|-----------------------|--------------------|-------------------|
| 279 to 365            | 202 to 274            | 600<br>660<br>1000 | 30 to 55          |

### ➤ Support Details

| Top/Bottom Cap              | Inner Mesh                  | Gasket           |
|-----------------------------|-----------------------------|------------------|
| Galvanized or AISI304 Steel | Galvanized Perforated Sheet | EPDM or Silicone |

### ➤ Filter Media Details

| Media                      | Brand                  | Air Permeability (at 200 Pa) | Pore Size (μ) |
|----------------------------|------------------------|------------------------------|---------------|
| Cellulose                  | Neenah Filtration (DE) | 280 l/m2                     | 45            |
| Polyester                  | General Tekstil (TR)   | 85 l/m2                      | 5             |
| PTFE Coating Polyester     | JP Air (DK)            | 370 l/m2                     | 1,2           |
| Alu Coating Polyester      | JP Air (DK)            | 470 l/m2                     | 1,2           |
| Oleo/Hydrophobic Polyester | JP Air (DK)            | 470 l/m2                     | 1             |
| Flame Retardant Blend      | Hifyber (TR)           | 170 l/m2                     | 0,4           |

- Please contact us for custom size filter production.
- Please contact us for filter media suitable for your process.
- We can increase the filter surface areas for the air flow you want